



# HC009S /EXT DAGSLYSSENSOR HF AV/PÅ UNIVERSAL

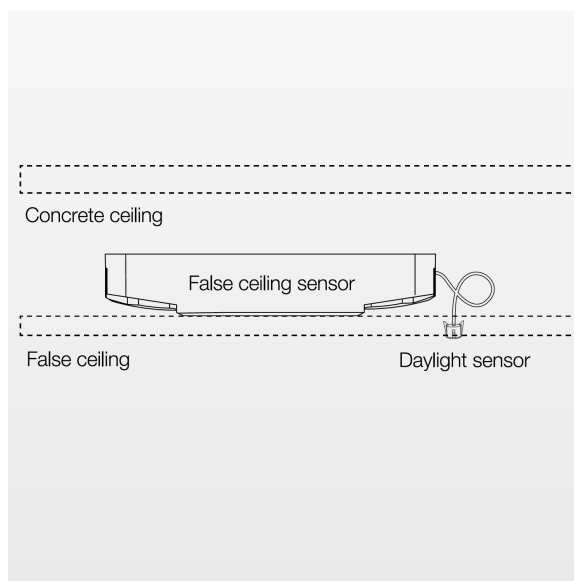

Universal dagslyssensor for montasje over himling. Av/På. Mulighet for synkronisering.

|                         |                                                                         |
|-------------------------|-------------------------------------------------------------------------|
| Art.nr.                 | LKA1961                                                                 |
| Monteringshøyde:        | Max 3                                                                   |
| Deteksjonsområde (DxH): | 12 x 3                                                                  |
| Deteksjonsområde (%):   | 10% / 50% / 75% / 100% kan justeres                                     |
| Holdetid:               | 2 s, 30 s, 1 min, 5 min, 10 min, 15 min, 20 min og 30 min, kan justeres |
| Switched power:         | Maks 1200 W (resistiv belastning) Maks 400W (kapasitiv belastning)      |
| Sensor-modus:           | HF                                                                      |
| Spenning:               | 220-240 V                                                               |
| Frekvens:               | 50/60 Hz                                                                |
| Systemforbruk:          | < 0.5 W                                                                 |
| Dimbar:                 | DALI                                                                    |
| IP-grad:                | IP20                                                                    |



19.05.2024

Med forbehold om endringer og trykkfeil.